

**TOWN OF LEICESTER**

Resolution # 0502-2026

In the Matter of the  
Establishment of a Water District in the Town of  
Leicester, Livingston County, New York, to be known  
as the “Town of Leicester West Town Water District.”

**RESOLUTION  
AND ORDER TO  
ESTABLISH  
DISTRICT**

(Pursuant to New York State  
Town Law §194)

---

**WHEREAS**, it is the intent of the Town of Leicester to create the Town of Leicester West Town Water District, to include all of the real property indicated in the map, plan and report prepared by Clark Patterson Lee, dated January, 2026 and being styled “Final Map, Plan and Report for the Town of Leicester West Town Water District (hereafter “Map, Plan and Report”), said real property being located in the Town of Leicester, County of Livingston and State of New York; and

**WHEREAS**, the real property that will be included in the district is more particularly described in said Map, Plan and Report filed in the Leicester Town Clerk’s Office and as being described in Schedule “A” attached hereto and made a part hereof; and

**WHEREAS**, in order to facilitate the creation of the “Town of Leicester West Town Water District” and the intended infrastructure improvements therein, the Town of Leicester Town Board (hereafter “Town Board”), pursuant to New York State Town Law §191-a., adopted a resolution on December 17, 2024, authorizing the engagement of Clark Patterson Lee (“CPL”) to prepare a Map, Plan and Report to delineate the proposed district and to provide the details of the improvements and the costs of such improvements to take place within the newly created district; and

**WHEREAS**, the Town Board therein directed that the charges incurred for the preliminary map, plan and report shall be a Town charge until such time as the district formation shall take place, at which time they shall become a district charge; and

**WHEREAS**, the above referenced resolution authorizing the preparation of the Map, Plan and Report was adopted subject to permissive referendum as required by New York State Town Law §191-a., and pursuant to New York State Town Law §90, a Public Notice of Resolution Adopted Subject to Permissive Referendum was subsequently published in the official newspaper of the Town of Leicester within ten (10) days of the adoption of such resolution, said notice having appeared in the Livingston County News on December 27, 2024; and

**WHEREAS**, on January 21, 2025, the Town Clerk of the Town of Leicester certified that no petitions meeting the requirements of New York State Town Law §91 and New York State Election Law §6-140(1)(a), seeking a permissive referendum with regard to the published notice, were filed within thirty (30) days after the adoption of such resolution; and

**WHEREAS**, the Town Engineer caused such Map, Plan and Report to be prepared and delivered to the Town Board and the Town Clerk of the Town of Leicester; and

**WHEREAS**, by resolution dated and approved on January 27, 2026, such Map, Plan and Report was accepted by the Town Board of the Town of Leicester and the Map, Plan and Report was filed in the Town Clerk's Office on January 27, 2026; and

**WHEREAS**, the Town Board of the Town of Leicester thereafter was presented with a petition pursuant to Article 12 of the New York State Town Law to create the Town of Leicester West Town Water District, which would include certain real property located wholly in the Town of Leicester, County of Livingston and State of New York; and

**WHEREAS**, said petition was signed by the owners of taxable real property situate in the proposed district owning in the aggregate at least one-half of the assessed valuation of all the taxable real property of the proposed district as shown upon the latest completed assessment roll of the Town of Leicester and included the signatures of resident owners owning taxable real property aggregating at least one-half of the assessed valuation of all taxable real property of the proposed district owned by resident owners according to the latest completed assessment roll; and

**WHEREAS**, such petition described the boundaries of the proposed district and identified the lands included therein as in a deed of conveyance; and

**WHEREAS**, such petition was signed by petitioners and acknowledged and authenticated in the manner provided by the New York State Election Law for the authentication of nominating petitions; and

**WHEREAS**, said petition stated the maximum amount proposed to be expended for improvements to be made to the proposed district as set forth in the Map, Plan and Report; and

**WHEREAS**, the Town Board on April 14, 2026 adopted a Resolution and Order pursuant to Town Law §193, directing that a public hearing be held on May 6, 2026, to receive public comment relating to the possible adoption of a resolution to establish the Town of Leicester West Town Water District; and

**WHEREAS**, the notice of Resolution and Order setting a public hearing was properly posted and published pursuant to New York State Town Law §193, appearing in the Town's official newspaper (the Livingston County News) on April 24, 2026; and

**WHEREAS**, the notice of Resolution and Order setting the public hearing contained all necessary information to comply with New York State Town Law §193; and

**WHEREAS**, a certified copy of the Resolution and Order directing that a public hearing be held was filed with the Office of the New York State Comptroller pursuant to New York State Town Law 193 1 b. (1); and

**WHEREAS**, a public hearing having been held on the 6<sup>th</sup> day of May, 2026, at 7:00 P.M. at the Leicester Town Hall located at 132 Main Street, Leicester, New York, with respect to the creation of the Town of Leicester West Town Water District, to include the property noted in the Map, Plan and Report and as more particularly described in the Map, Plan and Report on file at the Leicester Town Clerk's Office, in the Town of Leicester, County of Livingston and State of New York; and

**WHEREAS**, a copy of the Map, Plan and Report describing the proposed district boundaries, the improvements to be constructed therein and a detailed explanation of the estimated cost of hook-up fees and the cost to the typical property, as well as the boundaries of the entire Town of Leicester West Town Water District, was available for the public inspection at the Leicester Town Clerk's Office prior to and at the public hearing referenced above and is attached hereto and made a part hereof; and

**WHEREAS**, the Board having previously complied with the relevant provisions of SEQR; and

**WHEREAS**, the Board having given due consideration to the testimony and evidence given at the public hearing conducted on May 6, 2026; and

**WHEREAS**, the Map, Plan and Report calls for the installation of approximately 50,545 linear feet of 8-inch water main, including hydrant, water services, gate valves, and other appurtenances, along Peoria Road, New Road, Covington Road, Coverdale Road, Cone Road, Bush Road, Dunkley Road, Leicester Road, and Jones Bridge Road. The project will serve approximately 137 residential, commercial, and agricultural properties; and

**WHEREAS**, the maximum amount proposed to be expended for the improvements above is \$6,971,000.00, of which \$4,879,700.00 is anticipated to come from a NYS EFC WIIA grant and \$2,091,300.00 will be financed through a low interest USDA-Rural Development loan; and

**WHEREAS**, the anticipated annual cost to the typical property located within the Town of Leicester West Town Water District shall be on a benefit basis and is estimated to be \$1,200.27; and

**WHEREAS**, that the estimated one-time costs for hook-up fees are \$3,750.00 for the typical property, including installation of a service line at the costs of approximately \$30.00 per linear foot (\$3,000.00 average), \$250.00 LCWSA permitting/inspection fee and \$500.00 for well isolation and interior plumbing modifications; and

**WHEREAS**, pursuant to New York State Town Law §194, the Town Board of the Town of Leicester wishes to establish the Town of Leicester West Town Water District as detailed in the Map, Plan and Report and as called for in the petition received by the Town Board; and

**WHEREAS**, because the anticipated cost to the typical property located within the Town of Leicester West Town Water District is estimated to be below that of the cost computed by the New York State Comptroller for the establishment of similar types of districts, the formation of the Town of Leicester West Town Water District will not require approval of the New York State Comptroller's Office.

**NOW THEREFORE**, be it

**RESOLVED and ORDERED** by the Town Board of the Town of Leicester as follows:

1. That the petition received by the Town seeking establishment of the Town of Leicester West Town Water District is signed, and acknowledged or proved, or authenticated as required by law and is otherwise sufficient;
2. That the petition received by the Town seeking establishment of the Town of Leicester West Town Water District complies with the requirements of New York State Town Law §191;
3. That all of the property and property owners within the proposed Town of Leicester West Town Water District are benefited thereby;
4. That all of the property and property owners benefited by the Town of Leicester West Town Water District are included within the limits of the proposed district;
5. That the notice of public hearing for the May 6, 2026 public hearing was published and posted as required by law and was otherwise sufficient; and
6. That it is in the public interest to form the Town of Leicester West Town Water District as set forth herein and in the Final Map, Plan and Report for the Town of Leicester West Town Water District dated January, 2026; and it is further

**RESOLVED and ORDERED**, that pursuant to New York State Town Law §194, the Town Board of the Town of Leicester does hereby establish the Town of Leicester West Town Water District as set forth in the Map, Plan and Report and as described on Schedule “A” attached hereto; and it is further

**RESOLVED and ORDERED**, that pursuant to New York State Town Law §194, the Town Board of the Town of Leicester does hereby approve the installation of approximately 50,545 linear feet of 8-inch water main, including hydrant, water services, gate valves, and other appurtenances, along Peoria Road, New Road, Covington Road, Coverdale Road, Cone Road, Bush Road, Dunkley Road, Leicester Road, and Jones Bridge Road. The project will serve approximately 137 residential, commercial, and agricultural properties. The maximum amount proposed to be expended for the improvements above is \$6,971,000.00, of which \$4,879,700.00 is anticipated to come from a NYS EFC WIIA grant and \$2,091,300.00 will be financed through a low interest USDA-Rural Development loan. The anticipated cost to the typical property located within the Town of Leicester West Town Water District is to be on a benefit basis and is estimated to be \$1,200.27 (which includes debt services and water usage charges) per equivalent dwelling unit. The estimated one-time costs for hook-up fees are \$3,750.00 for the typical property, including installation of a service line at the costs of approximately \$30.00 per linear foot (\$3,000.00 average), \$250.00 LCWSA permitting/inspection fee and \$500.00 for well isolation and interior plumbing modifications; and it is further

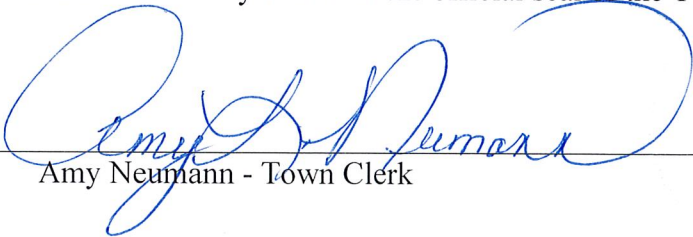
**RESOLVED and ORDERED**, that within ten (10) days after the adoption of this Resolution, the Town Clerk is directed to file a certified copy this Resolution and Order with the New York State Department of Audit and Control.

The question of the adoption of the foregoing Resolution was duly submitted for approval by vote of the Leicester Town Board on May 12, 2026, recorded as follows:

**Vote of the Board:**    **Councilperson Karen Roffe**    -                      Yes    
                                 **Councilperson Matt Durbin**    -                      Yes    
                                 **Councilperson Jerry Hull**        -                      Yes    
                                 **Councilperson Jason Yasso**    -                      Yes    
                                 **Supervisor Rich White**        -                      Yes  

This is to certify that I, the undersigned, Clerk of the Board of the Town of Leicester, Livingston County, New York, was duly adopted by the Town Board of said Town on the date above, and that the same is a true and correct transcript of said resolution.

In witness where of I have hereunto set my hand and the official seal of the Town Clerk this 12<sup>th</sup> day of May, 2026.

  
\_\_\_\_\_  
Amy Neumann - Town Clerk

**SCHEDULE A  
TOWN OF LEICESTER**

**PROPOSED TOWN OF LEICESTER WEST TOWN WATER DISTRICT**

All that tract or parcel of land situate in the Town of Leicester, County of Livingston, State of New York, being described as follows:

Using the New York State Plane NAD 83, west zone, U.S. Survey foot coordinate system, beginning at Point 'A', whose Northing is 1015575.1145' and whose Easting is 1327338.2829'; thence,

1. Bearing N 01° 37' 45" W for a distance of 978.67 feet, more or less, to a point; thence,
2. Bearing S 89° 04' 41" E for a distance of 615.39 feet, more or less, to a point; thence,
3. Bearing N 00° 08' 36" W for a distance of 463.59 feet, more or less, to a point; thence,
4. Bearing S 87° 59' 38" E for a distance of 1058.05 feet, more or less, to a point; thence,
5. Bearing N 01° 15' 47" W for a distance of 776.56 feet, more or less, to a point; thence,
6. Bearing N 01° 15' 47" W for a distance of 24.67 feet, more or less, to a point; thence,
7. Bearing S 89° 56' 49" E for a distance of 397.51 feet, more or less, to a point; thence,
8. Bearing N 01° 03' 38" W for a distance of 26.16 feet, more or less, to a point; thence,
9. Bearing N 01° 03' 38" W for a distance of 205.27 feet, more or less, to a point; thence,
10. Bearing N 90° 00' 00" W for a distance of 174.75 feet, more or less, to a point; thence,
11. Bearing N 00° 25' 33" W for a distance of 443.66 feet, more or less, to a point; thence,
12. Bearing S 86° 13' 03" E for a distance of 199.92 feet, more or less, to a point; thence,
13. Bearing S 45° 53' 20" E for a distance of 165.32 feet, more or less, to a point; thence,
14. Bearing S 78° 56' 36" E for a distance of 490.65 feet, more or less, to a point; thence,
15. Bearing N 00° 28' 50" W for a distance of 648.45 feet, more or less, to a point; thence,
16. Bearing S 89° 21' 24" E for a distance of 254.91 feet, more or less, to a point; thence,
17. Bearing N 90° 00' 00" E for a distance of 43.52 feet, more or less, to a point; thence,
18. Bearing S 63° 01' 51" E for a distance of 501.66 feet, more or less, to a point; thence,
19. Bearing S 89° 44' 43" E for a distance of 296.76 feet, more or less, to a point; thence,
20. Bearing S 51° 59' 38" E for a distance of 252.75 feet, more or less, to a point; thence,
21. Bearing S 00° 00' 00" W for a distance of 228.70 feet, more or less, to a point; thence,
22. Bearing S 19° 39' 12" E for a distance of 39.21 feet, more or less, to a point; thence,
23. Bearing N 89° 45' 49" E for a distance of 639.67 feet, more or less, to a point; thence,
24. Bearing N 80° 31' 15" E for a distance of 325.99 feet, more or less, to a point; thence,
25. Bearing S 04° 23' 55" W for a distance of 339.61 feet, more or less, to a point; thence,
26. Bearing S 07° 29' 27" W for a distance of 150.22 feet, more or less, to a point; thence,
27. Bearing S 89° 32' 50" W for a distance of 0.94 feet, more or less, to a point; thence,
28. Bearing S 08° 31' 23" W for a distance of 1231.99 feet, more or less, to a point; thence,
29. Bearing S 08° 29' 21" W for a distance of 637.47 feet, more or less, to a point; thence,
30. Bearing S 08° 20' 22" W for a distance of 784.06 feet, more or less, to a point; thence,
31. Bearing S 08° 20' 22" W for a distance of 1351.57 feet, more or less, to a point; thence,

32. Bearing S 63° 25' 59" W for a distance of 13.09 feet, more or less, to a point; thence,
33. Bearing S 07° 40' 07" W for a distance of 729.29 feet, more or less, to a point; thence,
34. Bearing S 59° 07' 36" E for a distance of 14.29 feet, more or less, to a point; thence,
35. Bearing S 27° 03' 17" W for a distance of 264.60 feet, more or less, to a point; thence,
36. Bearing S 63° 26' 06" E for a distance of 75.07 feet, more or less, to a point; thence,
37. Bearing S 03° 27' 33" W for a distance of 208.66 feet, more or less, to a point; thence,
38. Bearing S 88° 56' 20" W for a distance of 97.14 feet, more or less, to a point; thence,
39. Bearing S 44° 25' 58" W for a distance of 158.43 feet, more or less, to a point; thence,
40. Bearing S 58° 57' 54" W for a distance of 165.13 feet, more or less, to a point; thence,
41. Bearing S 33° 00' 10" W for a distance of 219.04 feet, more or less, to a point; thence,
42. Bearing S 15° 49' 26" E for a distance of 116.53 feet, more or less, to a point; thence,
43. Bearing S 29° 43' 59" W for a distance of 47.33 feet, more or less, to a point; thence,
44. Bearing N 50° 26' 20" W for a distance of 16.09 feet, more or less, to a point; thence,
45. Bearing N 39° 13' 06" W for a distance of 60.57 feet, more or less, to a point; thence,
46. Bearing N 28° 09' 48" W for a distance of 41.01 feet, more or less, to a point; thence,
47. Bearing N 49° 49' 14" W for a distance of 56.48 feet, more or less, to a point; thence,
48. Bearing N 49° 01' 40" W for a distance of 48.26 feet, more or less, to a point; thence,
49. Bearing N 36° 31' 45" W for a distance of 32.22 feet, more or less, to a point; thence,
50. Bearing N 34° 46' 43" W for a distance of 42.03 feet, more or less, to a point; thence,
51. Bearing N 52° 03' 28" W for a distance of 71.74 feet, more or less, to a point; thence,
52. Bearing N 59° 48' 32" W for a distance of 61.02 feet, more or less, to a point; thence,
53. Bearing N 62° 44' 35" W for a distance of 35.60 feet, more or less, to a point; thence,
54. Bearing N 80° 08' 00" W for a distance of 22.39 feet, more or less, to a point; thence,
55. Bearing S 65° 33' 14" W for a distance of 11.59 feet, more or less, to a point; thence,
56. Bearing S 16° 23' 18" W for a distance of 16.99 feet, more or less, to a point; thence,
57. Bearing S 15° 56' 33" W for a distance of 13.96 feet, more or less, to a point; thence,
58. Bearing S 30° 08' 33" W for a distance of 34.37 feet, more or less, to a point; thence,
59. Bearing S 39° 48' 19" W for a distance of 37.45 feet, more or less, to a point; thence,
60. Bearing S 50° 49' 37" W for a distance of 33.40 feet, more or less, to a point; thence,
61. Bearing S 53° 47' 43" W for a distance of 58.23 feet, more or less, to a point; thence,
62. Bearing S 50° 10' 36" W for a distance of 50.99 feet, more or less, to a point; thence,
63. Bearing S 60° 28' 44" W for a distance of 59.52 feet, more or less, to a point; thence,
64. Bearing S 67° 40' 16" W for a distance of 37.78 feet, more or less, to a point; thence,
65. Bearing S 81° 07' 11" W for a distance of 40.42 feet, more or less, to a point; thence,
66. Bearing N 87° 40' 43" W for a distance of 46.22 feet, more or less, to a point; thence,
67. Bearing N 76° 39' 38" W for a distance of 62.21 feet, more or less, to a point; thence,
68. Bearing N 59° 20' 09" W for a distance of 81.98 feet, more or less, to a point; thence,
69. Bearing N 57° 05' 42" W for a distance of 75.81 feet, more or less, to a point; thence,
70. Bearing N 65° 53' 50" W for a distance of 51.96 feet, more or less, to a point; thence,
71. Bearing N 77° 36' 19" W for a distance of 58.14 feet, more or less, to a point; thence,
72. Bearing S 88° 40' 04" W for a distance of 53.68 feet, more or less, to a point; thence,
73. Bearing S 81° 29' 33" W for a distance of 80.13 feet, more or less, to a point; thence,
74. Bearing S 80° 23' 35" W for a distance of 41.14 feet, more or less, to a point; thence,
75. Bearing S 86° 22' 02" W for a distance of 39.39 feet, more or less, to a point; thence,
76. Bearing S 87° 03' 13" W for a distance of 84.98 feet, more or less, to a point; thence,
77. Bearing N 89° 15' 22" W for a distance of 96.11 feet, more or less, to a point; thence,

78. Bearing S 85° 14' 12" W for a distance of 22.54 feet, more or less, to a point; thence,
79. Bearing N 82° 52' 32" W for a distance of 30.19 feet, more or less, to a point; thence,
80. Bearing N 68° 46' 35" W for a distance of 68.95 feet, more or less, to a point; thence,
81. Bearing N 56° 15' 25" W for a distance of 56.28 feet, more or less, to a point; thence,
82. Bearing N 45° 56' 24" W for a distance of 53.84 feet, more or less, to a point; thence,
83. Bearing N 30° 57' 46" W for a distance of 40.03 feet, more or less, to a point; thence,
84. Bearing N 25° 01' 01" W for a distance of 41.32 feet, more or less, to a point; thence,
85. Bearing N 43° 13' 43" W for a distance of 42.82 feet, more or less, to a point; thence,
86. Bearing N 60° 49' 56" W for a distance of 61.46 feet, more or less, to a point; thence,
87. Bearing N 57° 29' 05" W for a distance of 173.81 feet, more or less, to a point; thence,
88. Bearing S 65° 24' 14" W for a distance of 601.23 feet, more or less, to a point; thence,
89. Bearing N 62° 31' 34" W for a distance of 30.96 feet, more or less, to a point; thence,
90. Bearing N 29° 01' 05" W for a distance of 499.63 feet, more or less, to a point; thence,
91. Bearing N 62° 11' 33" W for a distance of 457.86 feet, more or less, to a point; thence,
92. Bearing S 86° 34' 56" W for a distance of 402.28 feet, more or less, to a point; thence,
93. Bearing N 01° 06' 08" W for a distance of 370.52 feet, more or less, to a point; thence,
94. Bearing N 85° 59' 32" W for a distance of 374.29 feet, more or less, to a point; thence,
95. Bearing N 77° 19' 39" W for a distance of 137.32 feet, more or less, to a point; thence,
96. Bearing N 75° 27' 23" W for a distance of 1233.37 feet, more or less, to a point; thence,
97. Bearing N 85° 54' 05" W for a distance of 499.11 feet, more or less, to a point; thence,
98. Bearing N 63° 38' 28" W for a distance of 1218.18 feet, more or less, to a point; thence,
99. Bearing S 00° 52' 18" E for a distance of 121.27 feet, more or less, to a point; thence,
100. Bearing S 00° 52' 19" E for a distance of 328.00 feet, more or less, to a point; thence,
101. Bearing S 01° 07' 29" E for a distance of 196.87 feet, more or less, to a point; thence,
102. Bearing S 02° 36' 12" E for a distance of 24.61 feet, more or less, to a point; thence,
103. Bearing S 84° 19' 58" E for a distance of 83.69 feet, more or less, to a point; thence,
104. Bearing S 79° 02' 44" E for a distance of 115.41 feet, more or less, to a point; thence,
105. Bearing S 72° 53' 50" E for a distance of 174.00 feet, more or less, to a point; thence,
106. Bearing S 62° 40' 50" E for a distance of 341.46 feet, more or less, to a point; thence,
107. Bearing S 64° 11' 14" E for a distance of 186.77 feet, more or less, to a point; thence,
108. Bearing S 64° 41' 55" E for a distance of 55.59 feet, more or less, to a point; thence,
109. Bearing S 74° 35' 47" E for a distance of 92.89 feet, more or less, to a point; thence,
110. Bearing S 84° 27' 16" E for a distance of 94.56 feet, more or less, to a point; thence,
111. Bearing S 88° 23' 39" E for a distance of 97.81 feet, more or less, to a point; thence,
112. Bearing S 80° 19' 35" E for a distance of 81.57 feet, more or less, to a point; thence,
113. Bearing S 74° 05' 34" E for a distance of 95.02 feet, more or less, to a point; thence,
114. Bearing S 64° 36' 15" E for a distance of 100.14 feet, more or less, to a point; thence,
115. Bearing S 61° 14' 25" E for a distance of 224.10 feet, more or less, to a point; thence,
116. Bearing S 00° 49' 46" E for a distance of 708.99 feet, more or less, to a point; thence,
117. Bearing N 89° 09' 11" E for a distance of 280.93 feet, more or less, to a point; thence,
118. Bearing N 89° 35' 51" E for a distance of 1210.03 feet, more or less, to a point; thence,
119. Bearing N 89° 35' 51" E for a distance of 168.25 feet, more or less, to a point; thence,
120. Bearing S 00° 57' 44" E for a distance of 79.85 feet, more or less, to a point; thence,
121. Bearing S 01° 17' 14" E for a distance of 246.37 feet, more or less, to a point; thence,
122. Bearing S 01° 06' 52" E for a distance of 234.67 feet, more or less, to a point; thence,
123. Bearing S 73° 53' 33" E for a distance of 0.77 feet, more or less, to a point; thence,

124. Bearing S 00° 29' 19" E for a distance of 162.80 feet, more or less, to a point; thence,
125. Bearing S 83° 55' 24" W for a distance of 159.31 feet, more or less, to a point; thence,
126. Bearing S 56° 29' 49" W for a distance of 48.17 feet, more or less, to a point; thence,
127. Bearing S 27° 21' 55" W for a distance of 167.07 feet, more or less, to a point; thence,
128. Bearing S 07° 13' 50" E for a distance of 95.52 feet, more or less, to a point; thence,
129. Bearing S 20° 32' 26" E for a distance of 90.69 feet, more or less, to a point; thence,
130. Bearing S 14° 39' 23" E for a distance of 95.02 feet, more or less, to a point; thence,
131. Bearing S 08° 31' 51" E for a distance of 57.21 feet, more or less, to a point; thence,
132. Bearing S 00° 00' 00" W for a distance of 43.84 feet, more or less, to a point; thence,
133. Bearing S 22° 17' 53" W for a distance of 48.46 feet, more or less, to a point; thence,
134. Bearing S 39° 36' 40" W for a distance of 53.24 feet, more or less, to a point; thence,
135. Bearing S 54° 33' 59" W for a distance of 45.13 feet, more or less, to a point; thence,
136. Bearing S 73° 12' 08" W for a distance of 39.15 feet, more or less, to a point; thence,
137. Bearing S 81° 58' 21" W for a distance of 55.70 feet, more or less, to a point; thence,
138. Bearing S 76° 17' 31" W for a distance of 29.84 feet, more or less, to a point; thence,
139. Bearing S 58° 16' 35" W for a distance of 45.72 feet, more or less, to a point; thence,
140. Bearing S 52° 39' 00" W for a distance of 33.80 feet, more or less, to a point; thence,
141. Bearing S 39° 55' 14" W for a distance of 45.18 feet, more or less, to a point; thence,
142. Bearing S 46° 58' 28" W for a distance of 29.02 feet, more or less, to a point; thence,
143. Bearing S 70° 28' 03" W for a distance of 23.26 feet, more or less, to a point; thence,
144. Bearing N 82° 39' 07" W for a distance of 22.10 feet, more or less, to a point; thence,
145. Bearing N 71° 33' 51" W for a distance of 22.36 feet, more or less, to a point; thence,
146. Bearing S 79° 06' 50" W for a distance of 18.72 feet, more or less, to a point; thence,
147. Bearing S 63° 02' 50" W for a distance of 46.81 feet, more or less, to a point; thence,
148. Bearing S 53° 07' 51" W for a distance of 17.68 feet, more or less, to a point; thence,
149. Bearing S 28° 36' 44" W for a distance of 35.44 feet, more or less, to a point; thence,
150. Bearing S 15° 39' 01" W for a distance of 41.93 feet, more or less, to a point; thence,
151. Bearing S 02° 21' 18" W for a distance of 51.67 feet, more or less, to a point; thence,
152. Bearing S 12° 31' 45" E for a distance of 39.12 feet, more or less, to a point; thence,
153. Bearing S 32° 40' 49" E for a distance of 44.53 feet, more or less, to a point; thence,
154. Bearing S 40° 50' 23" E for a distance of 55.15 feet, more or less, to a point; thence,
155. Bearing S 34° 54' 13" E for a distance of 37.08 feet, more or less, to a point; thence,
156. Bearing S 22° 45' 03" E for a distance of 23.77 feet, more or less, to a point; thence,
157. Bearing S 11° 25' 24" W for a distance of 14.28 feet, more or less, to a point; thence,
158. Bearing S 51° 20' 25" W for a distance of 22.64 feet, more or less, to a point; thence,
159. Bearing S 72° 28' 23" W for a distance of 28.18 feet, more or less, to a point; thence,
160. Bearing N 90° 00' 00" W for a distance of 45.26 feet, more or less, to a point; thence,
161. Bearing N 33° 18' 09" W for a distance of 50.25 feet, more or less, to a point; thence,
162. Bearing N 73° 34' 55" W for a distance of 69.47 feet, more or less, to a point; thence,
163. Bearing S 01° 57' 05" E for a distance of 46.81 feet, more or less, to a point; thence,
164. Bearing S 01° 57' 03" E for a distance of 772.07 feet, more or less, to a point; thence,
165. Bearing S 88° 09' 22" E for a distance of 665.86 feet, more or less, to a point; thence,
166. Bearing S 88° 09' 21" E for a distance of 89.25 feet, more or less, to a point; thence,
167. Bearing S 87° 49' 03" E for a distance of 448.86 feet, more or less, to a point; thence,
168. Bearing N 34° 45' 04" E for a distance of 263.31 feet, more or less, to a point; thence,
169. Bearing N 89° 17' 38" E for a distance of 44.19 feet, more or less, to a point; thence,

170. Bearing N 89° 17' 38" E for a distance of 998.23 feet, more or less, to a point; thence,
171. Bearing S 02° 00' 07" W for a distance of 62.03 feet, more or less, to a point; thence,
172. Bearing N 87° 05' 46" E for a distance of 293.54 feet, more or less, to a point; thence,
173. Bearing S 03° 51' 29" E for a distance of 195.40 feet, more or less, to a point; thence,
174. Bearing S 50° 44' 02" E for a distance of 180.00 feet, more or less, to a point; thence,
175. Bearing S 87° 29' 30" E for a distance of 224.11 feet, more or less, to a point; thence,
176. Bearing N 02° 00' 58" E for a distance of 113.50 feet, more or less, to a point; thence,
177. Bearing N 46° 27' 13" E for a distance of 106.51 feet, more or less, to a point; thence,
178. Bearing N 05° 32' 17" E for a distance of 439.60 feet, more or less, to a point; thence,
179. Bearing S 88° 29' 47" E for a distance of 593.83 feet, more or less, to a point; thence,
180. Bearing N 03° 23' 19" E for a distance of 64.03 feet, more or less, to a point; thence,
181. Bearing N 87° 13' 36" E for a distance of 125.90 feet, more or less, to a point; thence,
182. Bearing N 87° 06' 14" E for a distance of 241.16 feet, more or less, to a point; thence,
183. Bearing N 87° 46' 52" E for a distance of 56.18 feet, more or less, to a point; thence,
184. Bearing S 00° 57' 01" E for a distance of 369.09 feet, more or less, to a point; thence,
185. Bearing N 89° 30' 51" E for a distance of 274.75 feet, more or less, to a point; thence,
186. Bearing S 00° 32' 53" E for a distance of 75.28 feet, more or less, to a point; thence,
187. Bearing S 00° 32' 52" E for a distance of 100.51 feet, more or less, to a point; thence,
188. Bearing S 00° 32' 52" E for a distance of 99.90 feet, more or less, to a point; thence,
189. Bearing S 00° 32' 52" E for a distance of 75.00 feet, more or less, to a point; thence,
190. Bearing S 00° 32' 52" E for a distance of 100.00 feet, more or less, to a point; thence,
191. Bearing S 00° 32' 52" E for a distance of 100.00 feet, more or less, to a point; thence,
192. Bearing S 00° 32' 51" E for a distance of 120.32 feet, more or less, to a point; thence,
193. Bearing N 89° 27' 06" E for a distance of 19.95 feet, more or less, to a point; thence,
194. Bearing S 00° 31' 35" E for a distance of 175.39 feet, more or less, to a point; thence,
195. Bearing S 00° 31' 35" E for a distance of 159.62 feet, more or less, to a point; thence,
196. Bearing N 88° 34' 35" E for a distance of 164.98 feet, more or less, to a point; thence,
197. Bearing N 88° 34' 35" E for a distance of 24.90 feet, more or less, to a point; thence,
198. Bearing S 00° 21' 28" E for a distance of 48.40 feet, more or less, to a point; thence,
199. Bearing N 79° 56' 50" E for a distance of 24.59 feet, more or less, to a point; thence,
200. Bearing N 86° 54' 55" E for a distance of 100.25 feet, more or less, to a point; thence,
201. Bearing S 00° 05' 06" E for a distance of 22.02 feet, more or less, to a point; thence,
202. Bearing S 00° 05' 06" E for a distance of 406.38 feet, more or less, to a point; thence,
203. Bearing S 00° 05' 05" E for a distance of 445.29 feet, more or less, to a point; thence,
204. Bearing N 89° 24' 14" W for a distance of 245.54 feet, more or less, to a point; thence,
205. Bearing S 00° 43' 12" E for a distance of 1450.64 feet, more or less, to a point; thence,
206. Bearing S 00° 58' 07" E for a distance of 564.92 feet, more or less, to a point; thence,
207. Bearing N 86° 52' 30" E for a distance of 451.60 feet, more or less, to a point; thence,
208. Bearing N 86° 06' 51" E for a distance of 413.58 feet, more or less, to a point; thence,
209. Bearing S 03° 06' 45" E for a distance of 208.07 feet, more or less, to a point; thence,
210. Bearing N 87° 41' 59" E for a distance of 1239.22 feet, more or less, to a point; thence,
211. Bearing S 19° 30' 31" W for a distance of 155.79 feet, more or less, to a point; thence,
212. Bearing S 19° 58' 59" W for a distance of 235.71 feet, more or less, to a point; thence,
213. Bearing S 19° 29' 13" W for a distance of 402.02 feet, more or less, to a point; thence,
214. Bearing S 19° 29' 13" W for a distance of 67.75 feet, more or less, to a point; thence,
215. Bearing N 88° 34' 57" W for a distance of 115.39 feet, more or less, to a point; thence,

216. Bearing S 87° 30' 47" W for a distance of 340.02 feet, more or less, to a point; thence,
217. Bearing S 89° 28' 04" W for a distance of 48.58 feet, more or less, to a point; thence,
218. Bearing S 04° 13' 13" E for a distance of 883.33 feet, more or less, to a point; thence,
219. Bearing S 89° 33' 33" W for a distance of 198.22 feet, more or less, to a point; thence,
220. Bearing S 89° 44' 00" W for a distance of 327.82 feet, more or less, to a point; thence,
221. Bearing S 01° 36' 25" E for a distance of 47.43 feet, more or less, to a point; thence,
222. Bearing S 00° 32' 08" E for a distance of 610.92 feet, more or less, to a point; thence,
223. Bearing S 89° 43' 40" W for a distance of 670.75 feet, more or less, to a point; thence,
224. Bearing S 00° 21' 16" E for a distance of 710.46 feet, more or less, to a point; thence,
225. Bearing S 00° 52' 29" E for a distance of 122.61 feet, more or less, to a point; thence,
226. Bearing S 22° 25' 33" W for a distance of 236.65 feet, more or less, to a point; thence,
227. Bearing S 02° 34' 17" E for a distance of 116.09 feet, more or less, to a point; thence,
228. Bearing S 86° 29' 08" W for a distance of 1104.51 feet, more or less, to a point; thence,
229. Bearing S 00° 24' 24" W for a distance of 244.80 feet, more or less, to a point; thence,
230. Bearing N 89° 31' 03" W for a distance of 1612.17 feet, more or less, to a point; thence,
231. Bearing N 89° 34' 04" W for a distance of 619.95 feet, more or less, to a point; thence,
232. Bearing N 89° 23' 48" W for a distance of 1236.28 feet, more or less, to a point; thence,
233. Bearing S 00° 20' 50" E for a distance of 145.74 feet, more or less, to a point; thence,
234. Bearing N 89° 29' 19" W for a distance of 392.23 feet, more or less, to a point; thence,
235. Bearing N 89° 41' 37" W for a distance of 66.94 feet, more or less, to a point; thence,
236. Bearing S 40° 17' 31" W for a distance of 21.93 feet, more or less, to a point; thence,
237. Bearing S 28° 44' 23" W for a distance of 25.72 feet, more or less, to a point; thence,
238. Bearing S 03° 22' 01" W for a distance of 24.77 feet, more or less, to a point; thence,
239. Bearing S 07° 47' 31" E for a distance of 34.87 feet, more or less, to a point; thence,
240. Bearing S 02° 34' 16" W for a distance of 24.32 feet, more or less, to a point; thence,
241. Bearing S 24° 26' 45" W for a distance of 26.37 feet, more or less, to a point; thence,
242. Bearing S 53° 58' 19" W for a distance of 34.63 feet, more or less, to a point; thence,
243. Bearing S 46° 41' 02" W for a distance of 17.50 feet, more or less, to a point; thence,
244. Bearing S 27° 11' 52" W for a distance of 29.44 feet, more or less, to a point; thence,
245. Bearing S 44° 27' 34" W for a distance of 21.81 feet, more or less, to a point; thence,
246. Bearing S 63° 26' 06" W for a distance of 23.58 feet, more or less, to a point; thence,
247. Bearing N 90° 00' 00" W for a distance of 22.91 feet, more or less, to a point; thence,
248. Bearing N 67° 22' 46" W for a distance of 18.91 feet, more or less, to a point; thence,
249. Bearing N 60° 04' 41" W for a distance of 58.33 feet, more or less, to a point; thence,
250. Bearing N 68° 47' 18" W for a distance of 26.14 feet, more or less, to a point; thence,
251. Bearing N 85° 54' 59" W for a distance of 20.42 feet, more or less, to a point; thence,
252. Bearing S 74° 21' 29" W for a distance of 9.44 feet, more or less, to a point; thence,
253. Bearing S 18° 26' 06" W for a distance of 11.50 feet, more or less, to a point; thence,
254. Bearing S 01° 35' 29" W for a distance of 52.39 feet, more or less, to a point; thence,
255. Bearing S 15° 45' 05" W for a distance of 29.47 feet, more or less, to a point; thence,
256. Bearing S 02° 29' 30" E for a distance of 16.74 feet, more or less, to a point; thence,
257. Bearing S 17° 37' 37" E for a distance of 66.06 feet, more or less, to a point; thence,
258. Bearing S 08° 07' 44" E for a distance of 20.57 feet, more or less, to a point; thence,
259. Bearing S 01° 55' 27" W for a distance of 43.30 feet, more or less, to a point; thence,
260. Bearing S 25° 38' 15" W for a distance of 41.19 feet, more or less, to a point; thence,
261. Bearing S 41° 04' 12" W for a distance of 33.77 feet, more or less, to a point; thence,

262. Bearing S 57° 22' 52" W for a distance of 32.38 feet, more or less, to a point; thence,
263. Bearing S 78° 11' 56" W for a distance of 24.89 feet, more or less, to a point; thence,
264. Bearing N 89° 27' 01" W for a distance of 37.83 feet, more or less, to a point; thence,
265. Bearing S 84° 43' 35" W for a distance of 23.74 feet, more or less, to a point; thence,
266. Bearing S 24° 18' 31" W for a distance of 12.37 feet, more or less, to a point; thence,
267. Bearing S 02° 43' 42" W for a distance of 15.29 feet, more or less, to a point; thence,
268. Bearing S 09° 51' 52" W for a distance of 16.98 feet, more or less, to a point; thence,
269. Bearing S 32° 22' 47" W for a distance of 17.66 feet, more or less, to a point; thence,
270. Bearing S 57° 46' 12" W for a distance of 19.78 feet, more or less, to a point; thence,
271. Bearing S 66° 12' 32" W for a distance of 36.96 feet, more or less, to a point; thence,
272. Bearing S 60° 47' 18" W for a distance of 31.67 feet, more or less, to a point; thence,
273. Bearing S 46° 38' 01" W for a distance of 18.01 feet, more or less, to a point; thence,
274. Bearing S 34° 20' 48" W for a distance of 26.43 feet, more or less, to a point; thence,
275. Bearing S 39° 38' 40" W for a distance of 33.06 feet, more or less, to a point; thence,
276. Bearing S 47° 51' 32" W for a distance of 30.41 feet, more or less, to a point; thence,
277. Bearing S 67° 56' 08" W for a distance of 14.52 feet, more or less, to a point; thence,
278. Bearing S 73° 46' 00" W for a distance of 29.92 feet, more or less, to a point; thence,
279. Bearing S 50° 03' 58" W for a distance of 20.40 feet, more or less, to a point; thence,
280. Bearing S 39° 02' 06" W for a distance of 34.65 feet, more or less, to a point; thence,
281. Bearing S 50° 42' 35" W for a distance of 20.68 feet, more or less, to a point; thence,
282. Bearing S 62° 06' 06" W for a distance of 13.99 feet, more or less, to a point; thence,
283. Bearing N 76° 59' 32" W for a distance of 4.85 feet, more or less, to a point; thence,
284. Bearing N 41° 56' 51" W for a distance of 38.63 feet, more or less, to a point; thence,
285. Bearing N 38° 55' 41" W for a distance of 36.47 feet, more or less, to a point; thence,
286. Bearing N 45° 09' 29" W for a distance of 46.67 feet, more or less, to a point; thence,
287. Bearing N 51° 33' 45" W for a distance of 29.25 feet, more or less, to a point; thence,
288. Bearing N 68° 20' 02" W for a distance of 28.57 feet, more or less, to a point; thence,
289. Bearing N 84° 35' 53" W for a distance of 27.03 feet, more or less, to a point; thence,
290. Bearing S 83° 17' 28" W for a distance of 24.90 feet, more or less, to a point; thence,
291. Bearing S 71° 47' 32" W for a distance of 29.10 feet, more or less, to a point; thence,
292. Bearing S 56° 49' 14" W for a distance of 22.60 feet, more or less, to a point; thence,
293. Bearing S 32° 44' 04" W for a distance of 12.11 feet, more or less, to a point; thence,
294. Bearing S 01° 16' 27" W for a distance of 16.37 feet, more or less, to a point; thence,
295. Bearing S 08° 06' 20" E for a distance of 12.89 feet, more or less, to a point; thence,
296. Bearing S 16° 19' 14" E for a distance of 84.13 feet, more or less, to a point; thence,
297. Bearing S 02° 46' 48" W for a distance of 37.50 feet, more or less, to a point; thence,
298. Bearing S 05° 20' 17" W for a distance of 19.54 feet, more or less, to a point; thence,
299. Bearing S 14° 37' 13" E for a distance of 34.58 feet, more or less, to a point; thence,
300. Bearing S 09° 27' 42" W for a distance of 26.55 feet, more or less, to a point; thence,
301. Bearing S 06° 00' 36" W for a distance of 27.79 feet, more or less, to a point; thence,
302. Bearing S 04° 34' 24" E for a distance of 13.68 feet, more or less, to a point; thence,
303. Bearing S 16° 02' 03" E for a distance of 32.92 feet, more or less, to a point; thence,
304. Bearing S 06° 52' 46" E for a distance of 21.25 feet, more or less, to a point; thence,
305. Bearing S 04° 57' 49" W for a distance of 16.79 feet, more or less, to a point; thence,
306. Bearing S 23° 27' 10" W for a distance of 17.36 feet, more or less, to a point; thence,
307. Bearing S 38° 29' 01" W for a distance of 18.12 feet, more or less, to a point; thence,

308. Bearing S 60° 38' 28" W for a distance of 20.03 feet, more or less, to a point; thence,
309. Bearing S 79° 05' 20" W for a distance of 30.74 feet, more or less, to a point; thence,
310. Bearing S 70° 49' 13" W for a distance of 17.71 feet, more or less, to a point; thence,
311. Bearing S 60° 51' 08" W for a distance of 43.31 feet, more or less, to a point; thence,
312. Bearing S 79° 18' 52" W for a distance of 19.62 feet, more or less, to a point; thence,
313. Bearing N 82° 08' 00" W for a distance of 55.81 feet, more or less, to a point; thence,
314. Bearing S 80° 20' 18" W for a distance of 17.34 feet, more or less, to a point; thence,
315. Bearing S 61° 29' 22" W for a distance of 33.52 feet, more or less, to a point; thence,
316. Bearing S 28° 28' 25" W for a distance of 24.41 feet, more or less, to a point; thence,
317. Bearing S 04° 21' 58" W for a distance of 19.11 feet, more or less, to a point; thence,
318. Bearing S 24° 51' 50" E for a distance of 16.43 feet, more or less, to a point; thence,
319. Bearing S 45° 56' 24" E for a distance of 15.69 feet, more or less, to a point; thence,
320. Bearing S 59° 41' 50" E for a distance of 32.44 feet, more or less, to a point; thence,
321. Bearing S 65° 53' 52" E for a distance of 75.70 feet, more or less, to a point; thence,
322. Bearing S 56° 05' 39" E for a distance of 26.73 feet, more or less, to a point; thence,
323. Bearing S 25° 02' 48" E for a distance of 17.18 feet, more or less, to a point; thence,
324. Bearing S 11° 18' 05" W for a distance of 9.27 feet, more or less, to a point; thence,
325. Bearing S 35° 51' 51" W for a distance of 37.25 feet, more or less, to a point; thence,
326. Bearing S 17° 23' 37" W for a distance of 31.63 feet, more or less, to a point; thence,
327. Bearing S 26° 13' 54" W for a distance of 27.98 feet, more or less, to a point; thence,
328. Bearing S 37° 46' 26" W for a distance of 18.41 feet, more or less, to a point; thence,
329. Bearing S 57° 26' 37" W for a distance of 28.05 feet, more or less, to a point; thence,
330. Bearing S 69° 23' 12" W for a distance of 42.35 feet, more or less, to a point; thence,
331. Bearing S 72° 03' 40" W for a distance of 53.14 feet, more or less, to a point; thence,
332. Bearing S 60° 40' 47" W for a distance of 30.45 feet, more or less, to a point; thence,
333. Bearing S 34° 54' 10" W for a distance of 19.07 feet, more or less, to a point; thence,
334. Bearing S 09° 43' 53" W for a distance of 12.91 feet, more or less, to a point; thence,
335. Bearing S 21° 48' 19" E for a distance of 19.59 feet, more or less, to a point; thence,
336. Bearing S 32° 43' 45" E for a distance of 39.69 feet, more or less, to a point; thence,
337. Bearing S 18° 26' 04" E for a distance of 56.35 feet, more or less, to a point; thence,
338. Bearing S 00° 47' 39" W for a distance of 26.19 feet, more or less, to a point; thence,
339. Bearing S 20° 25' 47" W for a distance of 27.09 feet, more or less, to a point; thence,
340. Bearing S 34° 59' 42" W for a distance of 35.52 feet, more or less, to a point; thence,
341. Bearing S 29° 00' 42" W for a distance of 49.49 feet, more or less, to a point; thence,
342. Bearing S 23° 32' 44" W for a distance of 35.51 feet, more or less, to a point; thence,
343. Bearing S 08° 41' 45" W for a distance of 31.27 feet, more or less, to a point; thence,
344. Bearing S 03° 54' 01" W for a distance of 32.08 feet, more or less, to a point; thence,
345. Bearing S 13° 01' 49" W for a distance of 22.58 feet, more or less, to a point; thence,
346. Bearing S 33° 12' 25" W for a distance of 23.91 feet, more or less, to a point; thence,
347. Bearing S 49° 19' 25" W for a distance of 30.69 feet, more or less, to a point; thence,
348. Bearing S 64° 26' 27" W for a distance of 37.09 feet, more or less, to a point; thence,
349. Bearing S 71° 33' 58" W for a distance of 34.50 feet, more or less, to a point; thence,
350. Bearing S 63° 25' 53" W for a distance of 14.64 feet, more or less, to a point; thence,
351. Bearing S 27° 09' 01" W for a distance of 15.94 feet, more or less, to a point; thence,
352. Bearing S 00° 00' 00" W for a distance of 15.20 feet, more or less, to a point; thence,
353. Bearing S 14° 02' 07" E for a distance of 13.50 feet, more or less, to a point; thence,

354. Bearing S 34° 44' 19" E for a distance of 60.63 feet, more or less, to a point; thence,
355. Bearing S 26° 44' 43" E for a distance of 25.86 feet, more or less, to a point; thence,
356. Bearing S 06° 50' 37" E for a distance of 45.79 feet, more or less, to a point; thence,
357. Bearing S 23° 28' 35" E for a distance of 75.77 feet, more or less, to a point; thence,
358. Bearing S 45° 00' 00" E for a distance of 25.72 feet, more or less, to a point; thence,
359. Bearing S 48° 30' 12" E for a distance of 12.62 feet, more or less, to a point; thence,
360. Bearing S 21° 48' 15" E for a distance of 7.83 feet, more or less, to a point; thence,
361. Bearing S 20° 51' 32" W for a distance of 8.17 feet, more or less, to a point; thence,
362. Bearing S 35° 12' 53" W for a distance of 15.14 feet, more or less, to a point; thence,
363. Bearing S 71° 10' 38" W for a distance of 16.91 feet, more or less, to a point; thence,
364. Bearing S 82° 02' 23" W for a distance of 43.33 feet, more or less, to a point; thence,
365. Bearing S 79° 55' 10" W for a distance of 33.25 feet, more or less, to a point; thence,
366. Bearing S 66° 36' 07" W for a distance of 41.21 feet, more or less, to a point; thence,
367. Bearing S 50° 47' 36" W for a distance of 17.84 feet, more or less, to a point; thence,
368. Bearing S 25° 39' 35" W for a distance of 41.15 feet, more or less, to a point; thence,
369. Bearing S 37° 30' 15" W for a distance of 19.71 feet, more or less, to a point; thence,
370. Bearing S 85° 54' 59" W for a distance of 10.21 feet, more or less, to a point; thence,
371. Bearing N 36° 31' 53" W for a distance of 24.44 feet, more or less, to a point; thence,
372. Bearing N 41° 04' 46" W for a distance of 37.63 feet, more or less, to a point; thence,
373. Bearing N 61° 27' 42" W for a distance of 23.60 feet, more or less, to a point; thence,
374. Bearing N 85° 06' 04" W for a distance of 25.55 feet, more or less, to a point; thence,
375. Bearing S 88° 43' 37" W for a distance of 49.11 feet, more or less, to a point; thence,
376. Bearing N 73° 15' 01" W for a distance of 39.12 feet, more or less, to a point; thence,
377. Bearing N 62° 18' 54" W for a distance of 33.86 feet, more or less, to a point; thence,
378. Bearing S 85° 14' 08" W for a distance of 23.36 feet, more or less, to a point; thence,
379. Bearing S 45° 48' 07" W for a distance of 15.86 feet, more or less, to a point; thence,
380. Bearing S 18° 26' 02" W for a distance of 16.47 feet, more or less, to a point; thence,
381. Bearing S 07° 07' 28" W for a distance of 21.00 feet, more or less, to a point; thence,
382. Bearing S 05° 11' 40" W for a distance of 19.17 feet, more or less, to a point; thence,
383. Bearing S 11° 18' 31" W for a distance of 17.71 feet, more or less, to a point; thence,
384. Bearing S 39° 48' 22" W for a distance of 13.56 feet, more or less, to a point; thence,
385. Bearing S 65° 22' 39" W for a distance of 22.92 feet, more or less, to a point; thence,
386. Bearing S 75° 57' 54" W for a distance of 10.74 feet, more or less, to a point; thence,
387. Bearing S 42° 42' 30" W for a distance of 30.72 feet, more or less, to a point; thence,
388. Bearing S 54° 27' 42" W for a distance of 22.40 feet, more or less, to a point; thence,
389. Bearing S 35° 13' 06" W for a distance of 18.06 feet, more or less, to a point; thence,
390. Bearing S 86° 29' 48" W for a distance of 42.62 feet, more or less, to a point; thence,
391. Bearing S 81° 15' 15" W for a distance of 22.83 feet, more or less, to a point; thence,
392. Bearing S 60° 38' 32" W for a distance of 15.93 feet, more or less, to a point; thence,
393. Bearing S 57° 05' 38" W for a distance of 17.58 feet, more or less, to a point; thence,
394. Bearing S 43° 27' 07" W for a distance of 22.72 feet, more or less, to a point; thence,
395. Bearing S 06° 00' 31" W for a distance of 16.58 feet, more or less, to a point; thence,
396. Bearing S 13° 34' 10" E for a distance of 25.90 feet, more or less, to a point; thence,
397. Bearing S 09° 51' 55" E for a distance of 20.26 feet, more or less, to a point; thence,
398. Bearing S 00° 00' 00" W for a distance of 16.49 feet, more or less, to a point; thence,
399. Bearing S 45° 48' 25" E for a distance of 43.58 feet, more or less, to a point; thence,

400. Bearing S 45° 00' 06" E for a distance of 25.78 feet, more or less, to a point; thence,
401. Bearing S 27° 12' 58" E for a distance of 34.16 feet, more or less, to a point; thence,
402. Bearing S 13° 59' 35" E for a distance of 28.72 feet, more or less, to a point; thence,
403. Bearing S 03° 00' 52" W for a distance of 33.03 feet, more or less, to a point; thence,
404. Bearing S 14° 25' 12" W for a distance of 31.37 feet, more or less, to a point; thence,
405. Bearing S 34° 49' 27" W for a distance of 48.64 feet, more or less, to a point; thence,
406. Bearing S 46° 47' 23" W for a distance of 39.30 feet, more or less, to a point; thence,
407. Bearing S 35° 45' 16" W for a distance of 26.74 feet, more or less, to a point; thence,
408. Bearing S 23° 11' 49" W for a distance of 26.44 feet, more or less, to a point; thence,
409. Bearing S 19° 32' 21" W for a distance of 28.55 feet, more or less, to a point; thence,
410. Bearing S 03° 34' 34" W for a distance of 13.92 feet, more or less, to a point; thence,
411. Bearing S 51° 20' 36" E for a distance of 11.12 feet, more or less, to a point; thence,
412. Bearing S 78° 37' 14" E for a distance of 17.16 feet, more or less, to a point; thence,
413. Bearing S 86° 43' 45" E for a distance of 51.35 feet, more or less, to a point; thence,
414. Bearing S 87° 23' 50" E for a distance of 32.26 feet, more or less, to a point; thence,
415. Bearing S 61° 08' 34" E for a distance of 27.32 feet, more or less, to a point; thence,
416. Bearing S 32° 33' 04" E for a distance of 27.23 feet, more or less, to a point; thence,
417. Bearing S 18° 46' 43" E for a distance of 25.79 feet, more or less, to a point; thence,
418. Bearing S 00° 39' 07" W for a distance of 42.97 feet, more or less, to a point; thence,
419. Bearing S 14° 51' 15" E for a distance of 32.38 feet, more or less, to a point; thence,
420. Bearing S 12° 24' 24" E for a distance of 25.00 feet, more or less, to a point; thence,
421. Bearing S 15° 02' 17" E for a distance of 33.87 feet, more or less, to a point; thence,
422. Bearing S 45° 00' 06" E for a distance of 23.48 feet, more or less, to a point; thence,
423. Bearing S 65° 09' 21" E for a distance of 29.06 feet, more or less, to a point; thence,
424. Bearing S 52° 56' 40" E for a distance of 29.98 feet, more or less, to a point; thence,
425. Bearing S 28° 58' 08" E for a distance of 31.25 feet, more or less, to a point; thence,
426. Bearing S 14° 59' 38" E for a distance of 28.31 feet, more or less, to a point; thence,
427. Bearing S 14° 49' 51" E for a distance of 24.80 feet, more or less, to a point; thence,
428. Bearing S 29° 03' 14" E for a distance of 40.22 feet, more or less, to a point; thence,
429. Bearing S 35° 32' 17" E for a distance of 33.60 feet, more or less, to a point; thence,
430. Bearing S 41° 17' 02" E for a distance of 26.64 feet, more or less, to a point; thence,
431. Bearing S 56° 18' 36" E for a distance of 26.41 feet, more or less, to a point; thence,
432. Bearing S 81° 19' 34" E for a distance of 29.14 feet, more or less, to a point; thence,
433. Bearing S 87° 23' 50" E for a distance of 32.26 feet, more or less, to a point; thence,
434. Bearing S 75° 57' 46" E for a distance of 26.17 feet, more or less, to a point; thence,
435. Bearing S 54° 54' 21" E for a distance of 22.08 feet, more or less, to a point; thence,
436. Bearing S 33° 33' 18" E for a distance of 34.45 feet, more or less, to a point; thence,
437. Bearing S 36° 36' 22" E for a distance of 21.29 feet, more or less, to a point; thence,
438. Bearing S 57° 46' 18" E for a distance of 26.55 feet, more or less, to a point; thence,
439. Bearing S 71° 33' 56" E for a distance of 35.51 feet, more or less, to a point; thence,
440. Bearing S 78° 41' 24" E for a distance of 34.86 feet, more or less, to a point; thence,
441. Bearing S 63° 58' 12" E for a distance of 23.37 feet, more or less, to a point; thence,
442. Bearing S 46° 18' 09" E for a distance of 30.39 feet, more or less, to a point; thence,
443. Bearing S 44° 27' 15" E for a distance of 72.51 feet, more or less, to a point; thence,
444. Bearing S 43° 45' 00" E for a distance of 39.54 feet, more or less, to a point; thence,
445. Bearing S 57° 20' 56" E for a distance of 59.73 feet, more or less, to a point; thence,

446. Bearing S 47° 34' 43" E for a distance of 38.36 feet, more or less, to a point; thence,
447. Bearing S 29° 28' 34" E for a distance of 38.70 feet, more or less, to a point; thence,
448. Bearing S 21° 48' 05" E for a distance of 36.81 feet, more or less, to a point; thence,
449. Bearing S 10° 58' 42" E for a distance of 23.08 feet, more or less, to a point; thence,
450. Bearing S 11° 18' 37" W for a distance of 24.90 feet, more or less, to a point; thence,
451. Bearing S 26° 50' 02" W for a distance of 46.51 feet, more or less, to a point; thence,
452. Bearing S 37° 16' 00" W for a distance of 28.22 feet, more or less, to a point; thence,
453. Bearing S 36° 42' 11" W for a distance of 33.50 feet, more or less, to a point; thence,
454. Bearing S 21° 10' 49" W for a distance of 35.14 feet, more or less, to a point; thence,
455. Bearing S 20° 01' 07" W for a distance of 134.08 feet, more or less, to a point; thence,
456. Bearing S 19° 31' 05" W for a distance of 48.23 feet, more or less, to a point; thence,
457. Bearing S 17° 18' 41" W for a distance of 78.76 feet, more or less, to a point; thence,
458. Bearing S 19° 08' 02" W for a distance of 50.65 feet, more or less, to a point; thence,
459. Bearing S 27° 01' 54" W for a distance of 26.86 feet, more or less, to a point; thence,
460. Bearing S 46° 50' 47" W for a distance of 21.42 feet, more or less, to a point; thence,
461. Bearing S 62° 26' 52" W for a distance of 12.67 feet, more or less, to a point; thence,
462. Bearing S 80° 45' 14" W for a distance of 21.27 feet, more or less, to a point; thence,
463. Bearing N 87° 06' 21" W for a distance of 87.03 feet, more or less, to a point; thence,
464. Bearing S 86° 11' 08" W for a distance of 22.02 feet, more or less, to a point; thence,
465. Bearing S 72° 11' 00" W for a distance of 14.36 feet, more or less, to a point; thence,
466. Bearing S 54° 05' 23" W for a distance of 17.48 feet, more or less, to a point; thence,
467. Bearing S 44° 31' 59" W for a distance of 24.56 feet, more or less, to a point; thence,
468. Bearing N 90° 00' 00" W for a distance of 53.87 feet, more or less, to a point; thence,
469. Bearing S 38° 15' 14" W for a distance of 881.43 feet, more or less, to a point; thence,
470. Bearing N 89° 48' 23" E for a distance of 32.83 feet, more or less, to a point; thence,
471. Bearing S 31° 51' 58" E for a distance of 65.47 feet, more or less, to a point; thence,
472. Bearing S 45° 00' 00" E for a distance of 51.00 feet, more or less, to a point; thence,
473. Bearing N 90° 00' 00" W for a distance of 105.19 feet, more or less, to a point; thence,
474. Bearing S 01° 04' 25" W for a distance of 532.10 feet, more or less, to a point; thence,
475. Bearing S 88° 16' 59" E for a distance of 597.29 feet, more or less, to a point; thence,
476. Bearing S 00° 42' 26" W for a distance of 828.48 feet, more or less, to a point; thence,
477. Bearing S 00° 52' 05" W for a distance of 421.93 feet, more or less, to a point; thence,
478. Bearing S 00° 46' 54" W for a distance of 581.64 feet, more or less, to a point; thence,
479. Bearing S 59° 13' 10" W for a distance of 69.71 feet, more or less, to a point; thence,
480. Bearing S 59° 21' 12" W for a distance of 706.29 feet, more or less, to a point; thence,
481. Bearing S 59° 08' 12" W for a distance of 708.90 feet, more or less, to a point; thence,
482. Bearing S 70° 52' 21" W for a distance of 79.47 feet, more or less, to a point; thence,
483. Bearing S 80° 34' 59" W for a distance of 108.23 feet, more or less, to a point; thence,
484. Bearing N 89° 25' 02" W for a distance of 851.51 feet, more or less, to a point; thence,
485. Bearing N 88° 41' 17" W for a distance of 1069.72 feet, more or less, to a point; thence,
486. Bearing N 88° 57' 17" W for a distance of 522.23 feet, more or less, to a point; thence,
487. Bearing N 00° 02' 32" W for a distance of 285.95 feet, more or less, to a point; thence,
488. Bearing N 00° 02' 32" W for a distance of 1078.45 feet, more or less, to a point; thence,
489. Bearing N 89° 16' 00" W for a distance of 950.06 feet, more or less, to a point; thence,
490. Bearing N 89° 16' 00" W for a distance of 315.11 feet, more or less, to a point; thence,
491. Bearing N 00° 23' 31" E for a distance of 1294.67 feet, more or less, to a point; thence,

492. Bearing N 00° 09' 50" E for a distance of 741.85 feet, more or less, to a point; thence,
493. Bearing N 89° 44' 35" W for a distance of 236.67 feet, more or less, to a point; thence,
494. Bearing N 00° 14' 02" W for a distance of 1005.47 feet, more or less, to a point; thence,
495. Bearing S 89° 28' 51" E for a distance of 1497.01 feet, more or less, to a point; thence,
496. Bearing N 00° 59' 16" E for a distance of 553.90 feet, more or less, to a point; thence,
497. Bearing N 00° 38' 17" E for a distance of 389.78 feet, more or less, to a point; thence,
498. Bearing S 88° 01' 06" E for a distance of 2029.95 feet, more or less, to a point; thence,
499. Bearing N 07° 43' 18" E for a distance of 291.88 feet, more or less, to a point; thence,
500. Bearing N 07° 43' 19" E for a distance of 758.96 feet, more or less, to a point; thence,
501. Bearing N 13° 02' 53" W for a distance of 288.47 feet, more or less, to a point; thence,
502. Bearing N 13° 31' 26" W for a distance of 412.89 feet, more or less, to a point; thence,
503. Bearing N 17° 36' 11" W for a distance of 741.01 feet, more or less, to a point; thence,
504. Bearing N 17° 56' 23" W for a distance of 279.45 feet, more or less, to a point; thence,
505. Bearing N 88° 41' 41" E for a distance of 626.10 feet, more or less, to a point; thence,
506. Bearing N 01° 05' 15" W for a distance of 1485.18 feet, more or less, to a point; thence,
507. Bearing N 49° 47' 08" E for a distance of 4.01 feet, more or less, to a point; thence,
508. Bearing N 01° 12' 22" W for a distance of 585.16 feet, more or less, to a point; thence,
509. Bearing N 84° 30' 46" E for a distance of 416.20 feet, more or less, to a point; thence,
510. Bearing N 00° 47' 19" W for a distance of 448.81 feet, more or less, to a point; thence,
511. Bearing N 00° 47' 20" W for a distance of 280.00 feet, more or less, to a point; thence,
512. Bearing N 52° 12' 41" E for a distance of 389.49 feet, more or less, to a point; thence,
513. Bearing N 00° 47' 19" W for a distance of 1355.63 feet, more or less, to a point; thence,
514. Bearing N 89° 01' 44" E for a distance of 326.16 feet, more or less, to a point; thence,
515. Bearing N 89° 19' 34" E for a distance of 394.71 feet, more or less, to a point; thence,
516. Bearing N 89° 30' 49" E for a distance of 200.29 feet, more or less, to a point; thence,
517. Bearing N 07° 49' 48" E for a distance of 361.99 feet, more or less, to a point; thence,
518. Bearing N 10° 20' 20" W for a distance of 215.35 feet, more or less, to a point; thence,
519. Bearing N 00° 00' 00" E for a distance of 420.84 feet, more or less, to a point; thence,
520. Bearing N 33° 52' 42" W for a distance of 120.69 feet, more or less, to a point; thence,
521. Bearing N 17° 05' 22" W for a distance of 113.25 feet, more or less, to a point; thence,
522. Bearing N 16° 21' 08" E for a distance of 186.85 feet, more or less, to a point; thence,
523. Bearing N 16° 37' 53" E for a distance of 86.28 feet, more or less, to a point; thence,
524. Bearing N 08° 41' 16" W for a distance of 32.74 feet, more or less, to a point; thence,
525. Bearing S 78° 44' 40" W for a distance of 414.19 feet, more or less, to a point; thence,
526. Bearing S 72° 47' 23" W for a distance of 260.00 feet, more or less, to a point; thence,
527. Bearing S 36° 18' 08" W for a distance of 171.45 feet, more or less, to a point; thence,
528. Bearing S 73° 39' 56" W for a distance of 483.30 feet, more or less, to a point; thence,
529. Bearing N 12° 06' 10" W for a distance of 155.00 feet, more or less, to a point; thence,
530. Bearing S 00° 58' 16" E for a distance of 1231.38 feet, more or less, to a point; thence,
531. Bearing S 89° 01' 44" W for a distance of 30.80 feet, more or less, to a point; thence,
532. Bearing S 89° 37' 58" W for a distance of 362.19 feet, more or less, to a point; thence,
533. Bearing S 00° 57' 10" E for a distance of 128.98 feet, more or less, to a point; thence,
534. Bearing S 86° 13' 02" W for a distance of 321.07 feet, more or less, to a point; thence,
535. Bearing S 55° 13' 04" W for a distance of 169.00 feet, more or less, to a point; thence,
536. Bearing S 05° 43' 02" W for a distance of 223.00 feet, more or less, to a point; thence,
537. Bearing S 52° 13' 01" W for a distance of 257.00 feet, more or less, to a point; thence,

538. Bearing S 69° 58' 01" W for a distance of 453.42 feet, more or less, to a point; thence,
539. Bearing S 67° 42' 53" W for a distance of 58.08 feet, more or less, to a point; thence,
540. Bearing S 79° 43' 07" W for a distance of 79.20 feet, more or less, to a point; thence,
541. Bearing N 82° 31' 59" W for a distance of 198.00 feet, more or less, to a point; thence,
542. Bearing N 84° 31' 59" W for a distance of 381.48 feet, more or less, to a point; thence,
543. Bearing N 53° 02' 00" W for a distance of 226.38 feet, more or less, to a point; thence,
544. Bearing N 62° 16' 51" W for a distance of 71.94 feet, more or less, to a point; thence,
545. Bearing N 83° 02' 01" W for a distance of 121.44 feet, more or less, to a point; thence,
546. Bearing N 86° 31' 59" W for a distance of 279.82 feet, more or less, to a point; thence,
547. Bearing S 00° 00' 00" W for a distance of 113.87 feet, more or less, to a point; thence,
548. Bearing N 87° 21' 13" W for a distance of 295.12 feet, more or less, to a point; thence,
549. Bearing S 89° 26' 37" W for a distance of 114.49 feet, more or less, to a point; thence,
550. Bearing S 87° 34' 15" W for a distance of 183.56 feet, more or less, to a point; thence,
551. Bearing N 87° 47' 51" W for a distance of 57.84 feet, more or less, to a point; thence,
552. Bearing N 73° 56' 25" W for a distance of 76.34 feet, more or less, to a point; thence,
553. Bearing N 67° 56' 57" W for a distance of 284.21 feet, more or less, to a point; thence,
554. Bearing N 64° 09' 19" W for a distance of 79.04 feet, more or less, to a point; thence,
555. Bearing N 58° 14' 26" W for a distance of 82.36 feet, more or less, to a point; thence,
556. Bearing N 49° 14' 11" W for a distance of 85.11 feet, more or less, to a point; thence,
557. Bearing N 68° 50' 16" W for a distance of 36.95 feet, more or less, to a point; thence,
558. Bearing S 72° 16' 20" W for a distance of 142.36 feet, more or less, to a point; thence,
559. Bearing S 66° 57' 38" W for a distance of 105.08 feet, more or less, to a point; thence,
560. Bearing N 42° 38' 27" W for a distance of 210.02 feet, more or less, to a point; thence,
561. Bearing N 52° 47' 19" W for a distance of 32.04 feet, more or less, to a point; thence,
562. Bearing N 00° 18' 41" W for a distance of 319.45 feet, more or less, to a point; thence,
563. Bearing N 00° 48' 10" W for a distance of 197.11 feet, more or less, to a point; thence,
564. Bearing N 00° 39' 51" W for a distance of 2094.07 feet, more or less, to a point; thence,
565. Bearing S 71° 28' 34" W for a distance of 45.25 feet, more or less, to a point; thence,
566. Bearing S 70° 48' 30" W for a distance of 447.99 feet, more or less, to a point; thence,
567. Bearing S 73° 22' 19" W for a distance of 389.22 feet, more or less, to a point; thence,
568. Bearing S 77° 00' 20" W for a distance of 124.85 feet, more or less, to a point; thence,
569. Bearing N 03° 38' 01" W for a distance of 191.44 feet, more or less, to a point; thence,
570. Bearing N 87° 46' 48" W for a distance of 271.00 feet, more or less, to a point; thence,
571. Bearing N 10° 47' 05" W for a distance of 269.66 feet, more or less, to a point; thence,
572. Bearing S 88° 54' 56" W for a distance of 10.81 feet, more or less, to a point; thence,
573. Bearing N 01° 36' 45" W for a distance of 325.23 feet, more or less, to a point; thence,
574. Bearing N 01° 36' 45" W for a distance of 640.99 feet, more or less, to a point; thence,
575. Bearing N 89° 46' 11" E for a distance of 1311.97 feet, more or less, to a point; thence,
576. Bearing S 89° 57' 46" E for a distance of 945.75 feet, more or less, to a point; thence,
577. Bearing N 01° 29' 46" W for a distance of 282.30 feet, more or less, to a point; thence,
578. Bearing N 11° 39' 13" E for a distance of 182.45 feet, more or less, to a point; thence,
579. Bearing N 02° 40' 01" W for a distance of 271.56 feet, more or less, to a point; thence,
580. Bearing N 10° 10' 35" W for a distance of 582.74 feet, more or less, to a point; thence,
581. Bearing N 89° 09' 47" W for a distance of 1153.26 feet, more or less, to a point; thence,
582. Bearing N 01° 08' 24" W for a distance of 1317.20 feet, more or less, to a point; thence,
583. Bearing N 89° 53' 07" W for a distance of 642.39 feet, more or less, to a point; thence,

584. Bearing N 00° 12' 25" E for a distance of 593.81 feet, more or less, to a point; thence,
585. Bearing N 00° 04' 12" W for a distance of 98.92 feet, more or less, to a point; thence,
586. Bearing S 59° 54' 43" E for a distance of 41.49 feet, more or less, to a point; thence,
587. Bearing N 88° 25' 50" E for a distance of 24.50 feet, more or less, to a point; thence,
588. Bearing N 75° 57' 52" E for a distance of 20.75 feet, more or less, to a point; thence,
589. Bearing N 66° 43' 16" E for a distance of 31.41 feet, more or less, to a point; thence,
590. Bearing N 59° 18' 53" E for a distance of 71.00 feet, more or less, to a point; thence,
591. Bearing N 69° 58' 11" E for a distance of 34.28 feet, more or less, to a point; thence,
592. Bearing N 84° 35' 42" E for a distance of 24.94 feet, more or less, to a point; thence,
593. Bearing S 83° 50' 38" E for a distance of 34.42 feet, more or less, to a point; thence,
594. Bearing S 73° 45' 45" E for a distance of 35.99 feet, more or less, to a point; thence,
595. Bearing S 62° 37' 37" E for a distance of 87.27 feet, more or less, to a point; thence,
596. Bearing S 78° 36' 54" E for a distance of 100.27 feet, more or less, to a point; thence,
597. Bearing S 68° 23' 29" E for a distance of 55.57 feet, more or less, to a point; thence,
598. Bearing S 78° 47' 58" E for a distance of 34.54 feet, more or less, to a point; thence,
599. Bearing N 80° 02' 57" E for a distance of 19.42 feet, more or less, to a point; thence,
600. Bearing N 77° 34' 30" E for a distance of 20.27 feet, more or less, to a point; thence,
601. Bearing N 66° 27' 35" E for a distance of 36.96 feet, more or less, to a point; thence,
602. Bearing N 66° 18' 43" E for a distance of 56.79 feet, more or less, to a point; thence,
603. Bearing N 88° 21' 49" E for a distance of 23.50 feet, more or less, to a point; thence,
604. Bearing S 78° 01' 15" E for a distance of 11.32 feet, more or less, to a point; thence,
605. Bearing S 66° 36' 19" E for a distance of 51.54 feet, more or less, to a point; thence,
606. Bearing S 74° 57' 28" E for a distance of 55.58 feet, more or less, to a point; thence,
607. Bearing S 64° 56' 07" E for a distance of 49.26 feet, more or less, to a point; thence,
608. Bearing S 87° 16' 26" E for a distance of 42.32 feet, more or less, to a point; thence,
609. Bearing S 63° 26' 06" E for a distance of 23.26 feet, more or less, to a point; thence,
610. Bearing S 76° 19' 43" E for a distance of 25.55 feet, more or less, to a point; thence,
611. Bearing S 41° 29' 54" E for a distance of 11.65 feet, more or less, to a point; thence,
612. Bearing S 30° 27' 44" E for a distance of 19.85 feet, more or less, to a point; thence,
613. Bearing S 62° 47' 06" E for a distance of 13.20 feet, more or less, to a point; thence,
614. Bearing S 88° 25' 50" E for a distance of 24.50 feet, more or less, to a point; thence,
615. Bearing N 82° 24' 19" E for a distance of 20.31 feet, more or less, to a point; thence,
616. Bearing S 85° 14' 11" E for a distance of 16.16 feet, more or less, to a point; thence,
617. Bearing S 59° 02' 12" E for a distance of 21.52 feet, more or less, to a point; thence,
618. Bearing S 37° 59' 26" E for a distance of 58.32 feet, more or less, to a point; thence,
619. Bearing S 54° 07' 21" E for a distance of 17.80 feet, more or less, to a point; thence,
620. Bearing S 68° 28' 54" E for a distance of 63.11 feet, more or less, to a point; thence,
621. Bearing S 83° 59' 28" E for a distance of 38.46 feet, more or less, to a point; thence,
622. Bearing N 81° 36' 26" E for a distance of 62.06 feet, more or less, to a point; thence,
623. Bearing N 88° 29' 33" E for a distance of 25.51 feet, more or less, to a point; thence,
624. Bearing S 73° 40' 38" E for a distance of 48.94 feet, more or less, to a point; thence,
625. Bearing S 86° 55' 55" E for a distance of 37.63 feet, more or less, to a point; thence,
626. Bearing N 72° 20' 51" E for a distance of 15.49 feet, more or less, to a point; thence,
627. Bearing N 66° 38' 40" E for a distance of 48.24 feet, more or less, to a point; thence,
628. Bearing N 76° 12' 59" E for a distance of 18.31 feet, more or less, to a point; thence,
629. Bearing S 81° 15' 17" E for a distance of 13.24 feet, more or less, to a point; thence,

- 630. Bearing S 67° 02' 22" E for a distance of 73.96 feet, more or less, to a point; thence,
- 631. Bearing S 78° 41' 28" E for a distance of 32.50 feet, more or less, to a point; thence,
- 632. Bearing S 57° 41' 26" E for a distance of 26.99 feet, more or less, to a point; thence,
- 633. Bearing S 69° 16' 45" E for a distance of 13.27 feet, more or less, to a point; thence,
- 634. Bearing N 90° 00' 00" E for a distance of 13.76 feet, more or less, to a point; thence,
- 635. Bearing N 68° 37' 30" E for a distance of 8.29 feet, more or less, to a point; thence,
- 636. Bearing N 73° 44' 23" E for a distance of 17.07 feet, more or less, to a point; thence,
- 637. Bearing S 82° 16' 14" E for a distance of 17.79 feet, more or less, to a point; thence,
- 638. Bearing S 01° 42' 21" E for a distance of 460.97 feet, more or less, to a point; thence,
- 639. Bearing S 89° 42' 25" E for a distance of 885.37 feet, more or less, to a point; thence,
- 640. Bearing S 89° 18' 00" E for a distance of 249.53 feet, more or less, to a point; thence,
- 641. Bearing S 89° 31' 17" E for a distance of 876.88 feet, more or less, to a point; thence,
- 642. Bearing N 00° 55' 38" E for a distance of 1303.05 feet, more or less, to a point; thence,
- 643. Bearing S 89° 03' 21" E for a distance of 135.55 feet, more or less, to a point; thence,
- 644. Bearing N 01° 16' 25" W for a distance of 1321.04 feet, more or less, to a point; thence,
- 645. Bearing N 89° 01' 27" E for a distance of 499.45 feet, more or less, to a point; thence,
- 646. Bearing N 01° 23' 20" W for a distance of 503.23 feet, more or less, to a point; thence,
- 647. Bearing N 88° 53' 52" E for a distance of 962.67 feet, more or less, to a point; thence,
- 648. Bearing N 88° 54' 29" E for a distance of 485.48 feet, more or less, to a point; thence,
- 649. Bearing N 88° 51' 25" E for a distance of 590.89 feet, more or less, to a point; thence,
- 650. Bearing N 88° 47' 51" E for a distance of 804.87 feet, more or less, to a point; thence,
- 651. Bearing N 88° 54' 34" E for a distance of 647.15 feet, more or less, to a point; thence,
- 652. Bearing N 88° 52' 21" E for a distance of 442.25 feet, more or less, to a point; thence,
- 653. Bearing N 88° 43' 28" E for a distance of 374.06 feet, more or less, to a point; thence,
- 654. Bearing N 88° 53' 15" E for a distance of 195.30 feet, more or less, to a point; thence,
- 655. Bearing S 06° 13' 44" W for a distance of 270.84 feet, more or less, to a point; thence,
- 656. Bearing N 89° 29' 04" E for a distance of 255.69 feet, more or less, to a point; thence,
- 657. Bearing N 27° 17' 59" E for a distance of 71.36 feet, more or less, to a point; thence,
- 658. Bearing N 58° 39' 25" W for a distance of 192.19 feet, more or less, to a point; thence,
- 659. Bearing N 25° 00' 45" E for a distance of 117.37 feet, more or less, to a point; thence,
- 660. Bearing N 25° 00' 45" E for a distance of 92.09 feet, more or less, to a point; thence,
- 661. Bearing N 25° 00' 45" E for a distance of 22.19 feet, more or less, to a point; thence,
- 662. Bearing S 58° 41' 22" E for a distance of 191.19 feet, more or less, to a point; thence,
- 663. Bearing S 58° 41' 22" E for a distance of 191.19 feet, more or less, to a point; thence,
- 664. Bearing S 58° 41' 22" E for a distance of 35.92 feet, more or less, to the Point of Beginning.

Using the New York State Plane NAD 83, west zone, U.S. Survey foot coordinate system, beginning at Point 'B', whose Northing is 1021167.5421' and whose Easting is 1330836.6903'; thence,

- 1. Bearing N 00° 43' 32" W for a distance of 1,136.23 feet, more or less, to a point; thence,
- 2. Bearing N 89° 00' 44" E for a distance of 568.40 feet, more or less, to a point; thence,
- 3. Bearing N 88° 48' 10" E for a distance of 820.80 feet, more or less, to a point; thence,
- 4. Bearing S 00° 01' 07" E for a distance of 1,670.09 feet, more or less, to a point; thence,
- 5. Bearing N 70° 55' 24" W for a distance of 2.41 feet, more or less, to a point; thence,
- 6. Bearing S 00° 03' 31" W for a distance of 408.38 feet, more or less, to a point; thence,

7. Bearing N 89° 16' 39" W for a distance of 1,357.92 feet, more or less, to a point; thence,
8. Bearing N 89° 14' 25" W for a distance of 288.80 feet, more or less, to a point; thence,
9. Bearing N 00° 31' 01" W for a distance of 424.53 feet, more or less, to a point; thence,
10. Bearing N 42° 38' 48" W for a distance of 79.15 feet, more or less, to a point; thence,
11. Bearing N 02° 09' 40" E for a distance of 162.50 feet, more or less, to a point; thence,
12. Bearing N 37° 41' 39" W for a distance of 85.19 feet, more or less, to a point; thence,
13. Bearing N 18° 19' 09" W for a distance of 324.12 feet, more or less, to a point; thence,
14. Bearing N 12° 26' 47" E for a distance of 15.91 feet, more or less, to a point; thence,
15. Bearing N 12° 26' 47" E for a distance of 26.10 feet, more or less, to a point; thence,
16. Bearing S 70° 35' 15" E for a distance of 207.07 feet, more or less, to a point; thence,
17. Bearing S 70° 15' 01" E for a distance of 292.33 feet, more or less, to the Point of Beginning.

Town of Leicester West Town Water District, as described above, contains approximately 3,966.60 acres of land.

The following parcels have been excluded from the proposed district:

87.-1-38.211

87.-1-38.212

78.-1-33

All as shown on a map prepared by CPL, entitled "Town of Leicester West Town Water District", dated January 9, 2026.

**IN WITNESS WHEREOF**, this Resolution 0502-2026 was properly adopted by the Town Board at its regularly scheduled Work meeting, Date May 12, 2026. The Motion was made by Councilmember Gerald Hull and Seconded by Councilmember Karen Roffe.

**VOTE OF THE BOARD:**

Richard White, Supervisor \_\_Aye\_\_


Karen Roffe, Councilmember \_\_Aye\_\_

Matt Durbin, Councilmember \_\_Aye\_\_

Gerald Hull, Councilmember \_\_Aye\_\_

Jason Yasso, Councilmember \_\_Aye\_\_

**BY ORDER OF THE TOWN  
BOARD OF THE TOWN OF  
LEICESTER**


  
\_\_\_\_\_  
Amy Neumann, Town Clerk

May 12, 2026

CERTIFICATION OF TOWN CLERK  
STATE OF NEW YORK)  
COUNTY OF LIVINGSTON) s.s:

Amy Neumann, Town Clerk of the Town of Leicester, Livingston County, New York, DOES HEREBY CERTIFY that she has compared the above Resolution duly adopted by the Town Board of the Town of Leicester on the 12,th day of May, 2026 with the original Resolution now on file in her office, and she certifies that it is a correct and true copy of that Resolution.

Dated: May 12, 2026

  
\_\_\_\_\_  
AMY NEUMANN, TOWN CLERK